



< Demolition hammers

GSH 11 VC PROFESSIONAL

DEMOLITION HAMMER WITH SDS MAX



<

1 / 7

>

Functions & key features



Unbeatable removal capacity: 1,100 kg of concrete per hour.

- The best weight-to-power ratio on the market
- Dual anti-vibration system: In the handle and in the machine's transmission mechanism
- Secure grip for increased productivity in perpendicular applications

Your Selection

✓ in carrying case with accessory set, Accessory

Change variant

4,339.00 QAR

Recommended retail price excluding VAT

Check availability on location

SELECT A VARIANT

✓ YOUR SELECTION



in carrying case with accessory set, Accessory

Order number: 0 611 336 060

4,339.00 QAR

Recommended retail price excluding VAT

Find a local dealer

Included in all variants

- ✓ Carrying case (spare part number 1 615 438 492)
- ✓ Grease tube (spare part number 1 615 430 010)
- ✓ Machine cloth
- ✓ 1 x pointed chisel, SDS max, RTec Speed, 400 mm
Order number: 2 608 690 167

Additional in this variant

- + Voltage 110 V

Your selection (https://www.bosch-professional.com/qa/en/products/gsh-110v)



in carrying case with accessory set, Accessory

Order number: 0 611 336 070

4,579.00 QAR

Recommended retail price excluding VAT

Find a local dealer

Included in all variants

- ✓ Carrying case (spare part number 1 615 438 492)
- ✓ Grease tube (spare part number 1 615 430 010)
- ✓ Machine cloth
- ✓ 1 x pointed chisel, SDS max, RTec Speed, 400 mm
Order number: 2 608 690 167

Additional in this variant

- + Voltage 240 V

Select Variant (https://www.bosch-professional.com/qa/en/products/gsh-240v)

TECHNICAL DATA

Performance data

Impact rate at rated speed

900 – 1,670 bpm

Additional data

Rated input power

1700 W

Additional data

Impact energy (according to EPTA 05/2016)	23 J
Voltage, electrical	110 V
Weight	11.4 kg
Tool holder	SDS max


Total vibration values (Chiselling in concrete)

Vibration emission value ah	7.6 m/s ²
Uncertainty K	1.5 m/s ²

Chiselling in concrete

Vibration emission value ah	7.6 m/s ²
Uncertainty K	1.5 m/s ²

The A-rated noise level of the power tool is typically as follows: Sound pressure level 94 dB(A); Sound power level 105 dB(A). Uncertainty K= 3 dB.

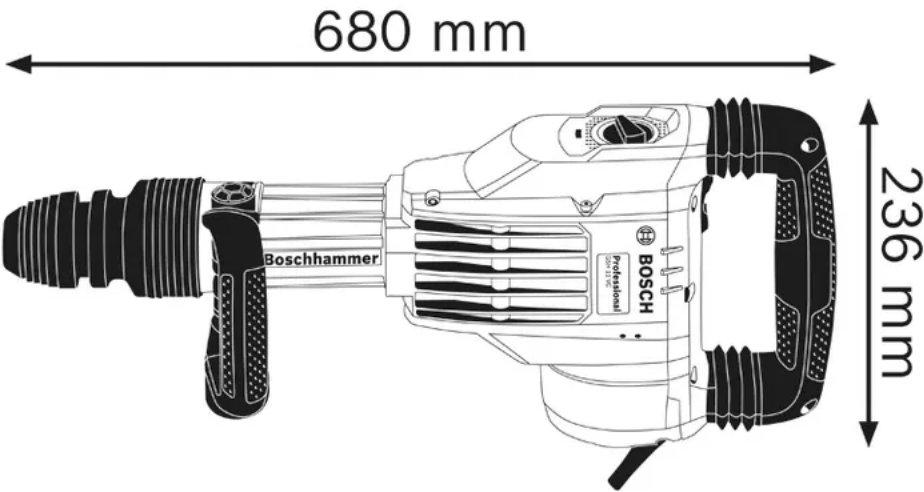

* You can find more information about the deviations in the following link: [Technical features of products](#)

NEED A SPARE PART?

Here you will find the right spare parts for your professional f

FITS TO GSH 11 VC PROFESSIONAL



GDE 68

System Accessories



GDE 162

System Accessories

Variants:1

from **259.00 QAR**

Recommended retail price
excluding VAT

(<https://www.bosch-professional.com/qa/en/products/gde-68-1600A001G7>)

Variants:1

from **359.00 QAR**

Recommended retail price
excluding VAT

(<https://www.bosch-professional.com/qa/en/products/gde-162-1600A001G8>)

DOWNLOADS

USER MANUAL

-  Instruction manual | GSH 11 VC (PDF 3.4 MB)
-  Insert | Herstellergarantie | Manufacturer's guarantee (EU) (PDF 0.2 MB)

DISTRIBUTORS | SERVICE CENTERS

Find the distributor or service center close to you

Learn more (<https://www.bosch-professional.com/qa/en/services/after-sales-service/customer-service/>)



Imprint Robert Bosch Power Tools GmbH

Privacy statement

About Bosch

Sustainability

Career

Press

Privacy settings

Report a Vulnerability

