

(//www.boschprofessional.com/qa/en/)

Search for tools or accessories...



 $Rotary\ hammers\ \ (https://www.bosch-professional.com/qa/en/rotary-hammers-131445-ocs-c/)\ \ GBH\ 5-40\ D\ Professional.com/qa/en/rotary-hammers-131445-ocs-c/)$

Rotary hammers

GBH 5-40 D PROFESSIONAL

ROTARY HAMMER WITH SDS MAX



<

1/4

Functions & key features





The powerful hammer with fastest drilling progress in its class

- Fastest drilling progress 30% faster than its predecessor
- High material removal rate 50% more impact energy than existing GBH 5-38 D
- Perfect handling well balanced tool for all applications

Your Selection

✓ in carrying case with Grease tube


Show variant


1,849.00 QAR

Recommended retail price excluding VAT

Check availability on location

GBH 5-40 D PROFESSIONAL



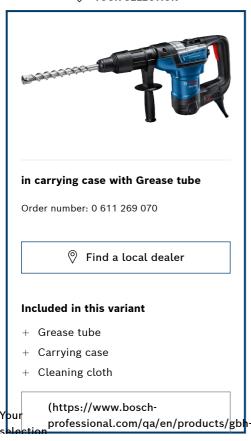

TECHNICAL DATA

Performance data

Impact rate at rated speed	1,500 - 2,900 bpm
Rated speed	170 – 340 rpm
Additional data	
Rated input power	1100 W
Rated input power Impact energy (according to EPTA 05/2016)	1100 W 8.5 J

Drilling range

Drilling dia. concrete, hammer drill bits	12 – 40 mm
Opt. appl. range concrete, hammer drill bits	18 – 32 mm
Drilling dia. concrete, breakthrough drill bits	45 – 55 mm
Drilling diameter in concrete with core cutters	40 – 90 mm
Total vibration values (Hammer drilling in concrete)	
Vibration emission value ah	14 m/s²
Uncertainty K	1.5 m/s²
Total vibration values (Chiselling in concrete)	
Vibration emission value ah	11.5 m/s²
Uncertainty K	1.5 m/s²
Hammer drilling in concrete	
Vibration emission value ah	14 m/s²
Uncertainty K	1.5 m/s ²
Chiselling in concrete	
Vibration emission value ah	11.5 m/s²
Uncertainty K	1.5 m/s ²

The A-rated noise level of the power tool is typically as follows: Sound pressure level 93.5 dB(A); Sound power level 104.5 dB(A). Uncertainty K= 3 dB.



^{*} You can find more information about the deviations in the following link: Technical features of products

GBH 5-40 D PROFESSIONAL: FURTHER INFORMATION

Product Highlights

The GBH 5-40 D Professional is the entry-level tool in Bosch's SDS max corded rotary hammer category. Its lightweight and compact design makes it ideal for work in hard-to-reach places. The rotary hammer is also designed for durability, featuring robust metal components and an optimised lubrication system. Its strong motor enables the delivery of 8.5 J of impact energy for a fast drilling progress and high material removal rate.

NEED A SPARE PART?

Here you will find the right spare parts for your professional $\mathfrak l$



Find a spare part



GDE 68

System Accessories



GDE 162System Accessories



Variants:1

from 259.00 QAR

Recommended retail price excluding VAT

(https://www.boschprofessional.com/qa/en/products/gde-68-1600A001G7)

Variants:1

from 359.00 QAR

Recommended retail price excluding VAT

(https://www.boschprofessional.com/qa/en/products/gde-162-1600A001G8)

Variants:1

from 519.00 QAR

Recommended retail price excluding VAT

(https://www.boschprofessional.com/qa/en/products/gdemax-1600A001G9)

DOWNLOADS

USER MANUAL

- (1) Instruction manual | GBH 5-40 D (PDF 3.8 MB)

DISTRIBUTORS | SERVICE CENTERS

Find the distributor or service center close to you

(//www.boschprofessional.com/qa/en/services/aftersalesservice/customerservice/)



Imprint Robert Bosch Power Tools GmbH

Privacy statement

About Bosch

Sustainability

Career

Press

Privacy settings

Report a Vulnerability

